

Discontinued

3 mm Square Low-Profile SMT Trimmer Potentiometers (Cermet, Open Frame Type)



Type: **EVM3W**

• Planned final production : March.2019


Features

- Low-profile 0.95 mm (1.1 mm max.)
- High reliability realized by cermet element
- Excellent mountability
- Conforms to JIS C5260-1:1999
- RoHS compliant

Recommended Applications

- Audio/visual, office, and communication equipment
- General electronic equipment

Explanation of Part Numbers

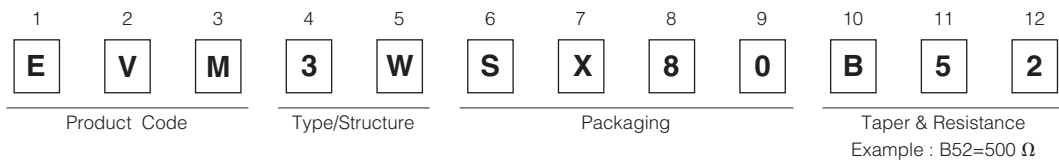

Specifications

| | |
|---------------------------------------|-----------------------------|
| Total Resistance Value | 100 Ω to 1 MΩ |
| Resistance Tolerance | ±25 % |
| Power Rating | 0.15 W |
| Limiting Element Voltage | 50 V |
| Rotation Torque | 2 to 20 mN·m |
| Temperature Coefficient of Resistance | ±250 × 10 ⁻⁶ /°C |

Minimum Quantity/Packing Unit

| Part Number | Taping | | |
|-------------|-------------------|--------------------|-------------------|
| | Quantity per reel | Packaging quantity | Dia. of reel (mm) |
| EVM3W | 3,000 | 15,000 | φ178 |

The standard packaging methods for a reel is φ178.

Please contact us, if you would like different packaging methods. (Bulk, Reel of φ330, Reel of φ380)

Dimensions in mm (not to scale)

- 3-terminal/Low-profile

